

## OnePool BHD 矿池挖矿教程


第一步注册账号：使用手机或邮箱注册均可；



The image shows the OnePool website homepage. At the top, there is a navigation bar with the OnePool logo and links for '首页', 'BHD生态池', 'BHD合作池', and 'Burst'. A red arrow points to the '注册' (Register) link. The main banner features the text 'ONEPOOL 释放新的力量 湾池网站正式上线' and a 3D cube graphic. Below the banner, there is a table displaying mining statistics for BHD生态池 and Burst.

生态池	全网容量	矿池容量	在线矿工	在线矿机
BHD 生态池	1389 PB	15.95 PB	25	147
Burst	238.79 PB	65.54 PB	186	327

第二步登陆注册好的账号，基本设置显示 AccountKey，矿池 DeadLine 为 31536000

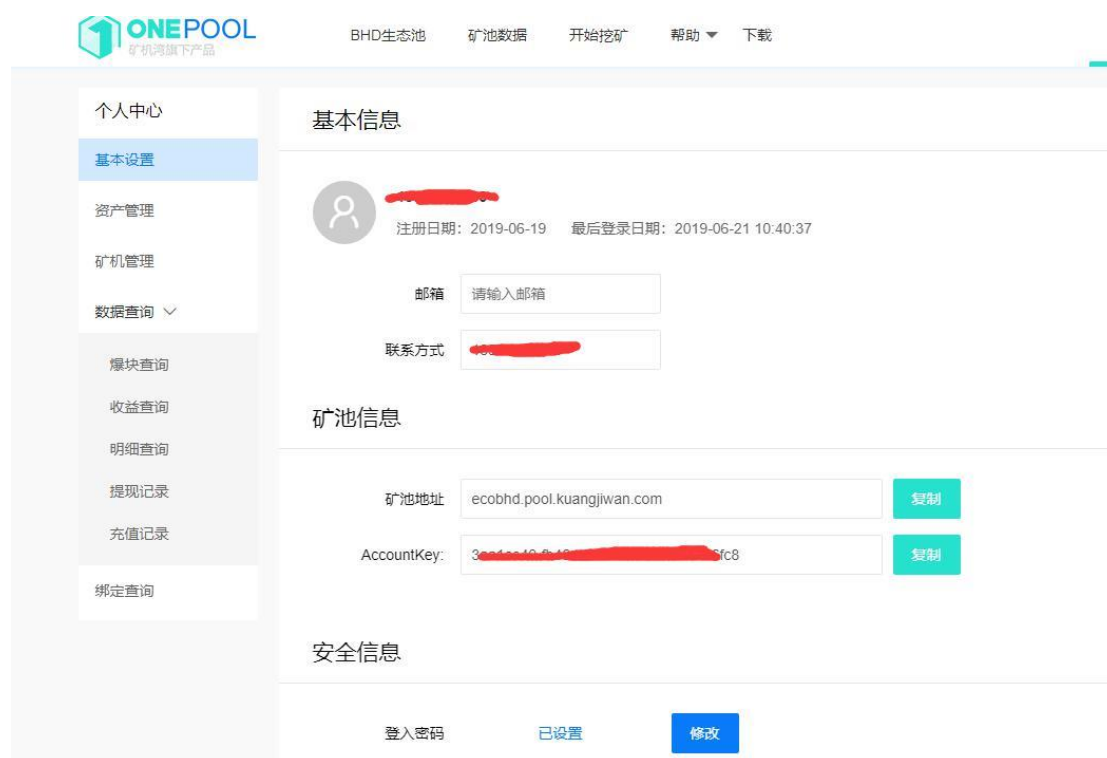

The image shows the user profile page in the OnePool dashboard. The left sidebar contains navigation options like '个人中心', '基本设置', '资产管理', etc. The main content area is titled '基本信息' and shows user details such as '注册日期: 2019-06-19' and '最后登录日期: 2019-06-21 10:40:37'. Below this, there are input fields for '邮箱' and '联系方式'. The '矿池信息' section displays the '矿池地址' as 'ecobhd.pool.kuangjiwan.com' and the 'AccountKey' as '3...16...8fc8', both with '复制' (Copy) buttons. The '安全信息' section shows '登入密码' as '已设置' (Already set) with a '修改' (Modify) button.

第三步点击绑定查询，申请绑定算力 ID 至矿池，点击立即绑定；



下载链接：

Miner 有 4 个版本，根据你机器的 CPU 指令集情况自行选择，下载完软件后解压打开 miner.conf，只需要修改三个地方；

矿机名称、Plot 文件路径、以及填写你矿池的 AccountKey 即可，如图



```
miner.conf - 记事本
文件(F) 编辑(E) 格式(O) 查看(V) 帮助(H)

["MinerName": "你的矿机名称",
"Mode": "pool",

"Server": "ecobhd.pool.kuangjiwan.com",
"Port": 80,

"UpdaterAddr": "ecobhd.pool.kuangjiwan.com",
"UpdaterPort": "80",

"InfoAddr": "ecobhd.pool.kuangjiwan.com",
"InfoPort": "80",

"EnableProxy": false,
"ProxyPort": 8126,

"Paths":[
"D:\\",
"D:\\",
"D:\\",
"D:\\",
"D:\\",
],
"AccountKey": "矿池AccountKey",

"CacheSize": 16384,
"CacheSize2": 262144,

"Debug": false,
"UseHDDWakeUp": true,

"TargetDeadline": 31536000,
```

矿机名称

修改Plot文件路径

输入矿池里的AccountKey  
注意只修改引号里的内容

保持不变

按上面修改好后执行 EXE 文件即开始挖矿。

或参考 BHD、Burst、BOOM 多挖教程

网址：<https://www.kuangjiwan.com/news/news-2644.html>